

CHR300-2

2V 300AH

High Rate Battery



CHR300-2



Physical Specification


Part Number:	CHR300-2
Length:	170±1mm (6.69 inches)
Width:	150±1mm (5.90 inches)
Container Height:	330±1mm (12.99 inches)
Total Height (with terminal):	345±1mm (13.58 inches)
Approx Weight:	18.1 Kg (39.9 lbs)

Specifications

	Nominal Voltage	2V
	Nominal Rate (W ,1.67V/cell)	857W
	Nominal Capacity (C10,1.80V/cell)	300Ah
	Technology	High Rate Discharge
	Terminal Type	M8
Container Material	Flame Retardant (FR)	ABS (UL94:VO)
Rated Capacity (25°C)	(10hr, 30.0A,1.80V/cell)	300.0 Ah
	(8hr, 36.0A,1.80V/cell)	288.0 Ah
	(5hr, 52.5A,1.75V/cell)	262.5 Ah
	(3hr, 78.0A,1.75V/cell)	234.0 Ah
	(1hr,180.0A,1.67V/cell)	180.0 Ah
Max Currents (5s)	2400A	
Internal Resistance	Approx. 0.75mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -20°C~55°C (-4°F~131°F)
		Charge: 0°C~40°C (32°F~104°F)
		Storage: -15°C~50°C (5°F~122°F)
Nominal Operating Temp. Range	Max.Charging Current(25°C)	75A
		Charge voltage(25°C)
	Temp. Coefficient -3m V/cell/ C	
	Equalization 2.35~2.40V	
	Effect of temperature on Capacity	40°C (104°F) 106%
		25°C (77°F) 100%
		0°C (32°F) 86%
Design Floating Life at 20°C	20+ Years	
Self Discharge	Canbat High Rate batteries may be stored for up to 6 months at 25°C (77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. Self-discharge is less than 2%	

Dimensions

M8 Terminal

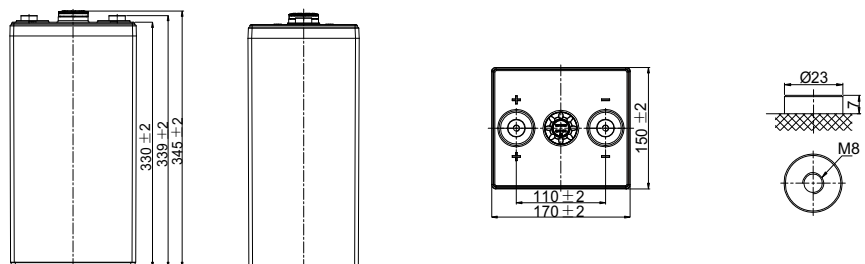

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

CHR300-2

2V 300AH

High Rate Battery




Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	614.4	453.5	300.5	261.9	214.2	169.3	148.2	113.9	92.3	70.2	56.5	47.7	33.6	28.1
1.80V/cell	687.1	507.2	349.5	301.7	242.1	189.3	164.0	124.7	100.4	76.0	60.9	51.3	36.0	30.0
1.75V/cell	732.9	541.1	369.7	316.6	253.1	197.0	170.1	128.9	103.5	78.0	62.4	52.5	36.7	30.5
1.70V/cell	771.0	569.1	390.7	333.2	264.2	204.5	176.3	133.2	106.8	80.3	64.0	53.7	37.3	30.9
1.67V/cell	783.3	578.3	403.1	342.6	270.9	209.1	180.0	135.6	108.6	81.5	64.9	54.4	37.7	31.2
1.60V/cell	794.5	586.5	432.0	364.8	286.2	219.9	188.8	141.7	113.1	84.5	67.0	56.0	38.6	31.9


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	1105.5	816.1	675.6	590.3	484.3	384.1	302.5	233.3	189.4	144.6	111.0	93.8	66.4	55.6
1.80V/cell	1236.4	912.8	777.4	673.6	542.9	426.4	332.5	253.8	205.0	155.8	119.2	100.8	71.0	59.3
1.75V/cell	1318.9	973.7	813.8	700.0	562.6	440.3	342.3	260.7	210.2	159.2	121.7	102.7	72.1	60.1
1.70V/cell	1387.4	1024.2	838.0	729.3	582.1	453.4	352.5	267.9	215.7	163.1	124.4	104.8	73.3	60.9
1.67V/cell	1409.5	1040.6	857.0	745.2	593.6	461.3	358.1	271.7	218.6	165.1	125.8	105.8	73.9	61.4
1.60V/cell	1429.7	1055.5	896.3	781.1	619.1	480.0	372.0	281.5	226.0	170.2	129.3	108.6	75.4	62.6


Discharge Characteristics

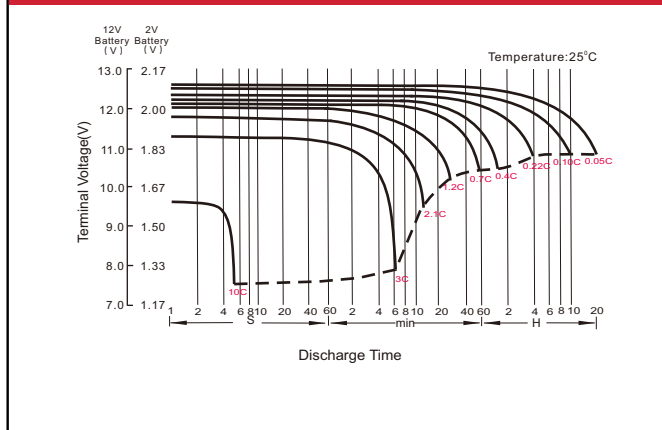


Float Charging Characteristics

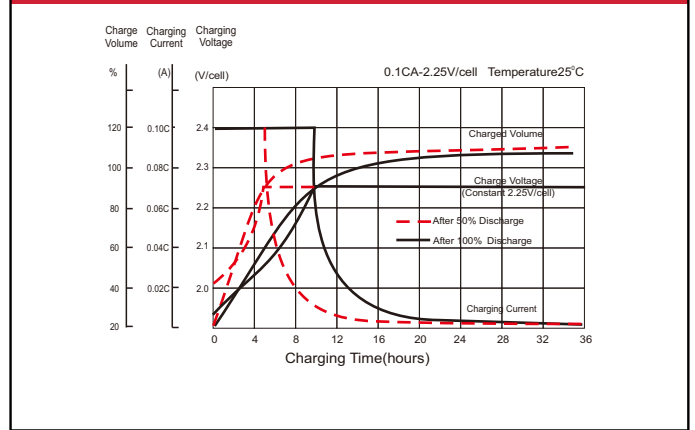

Temperature Effects in Relation to Battery Capacity

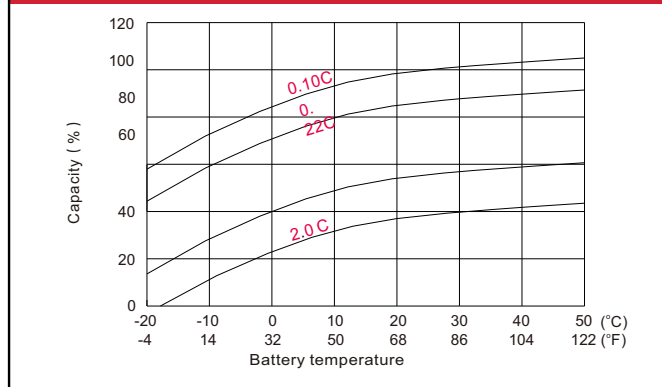

Temperature Effects on Long Term Float Life

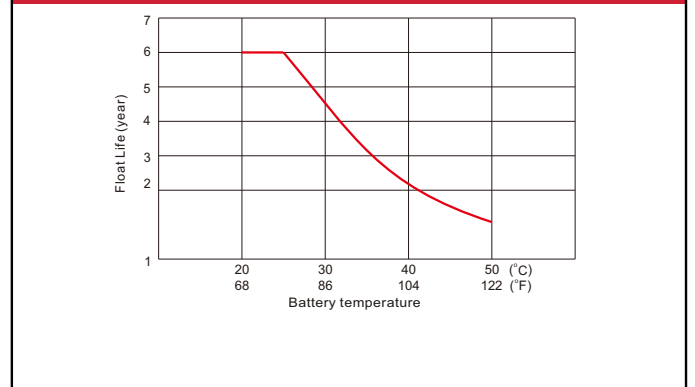

High Rate Batteries

The most important asset for many businesses is data. Whether it's customer data, employee data or financial data, no business can afford to lose it. Unfortunately, unexpected power interruptions may lead to a loss of data, which could potentially cost thousands of dollars. To solve this issue, Canbat has developed the highest performing high rate batteries, which are specially designed for back-up power systems. Our batteries have a proven track record to be the most reliable in the industry, backed up with the best warranty in Canada. In the event of a power outage, UPS systems provide back-up power to your equipment. The most important component in any UPS is the battery. Whether the UPS is hooked up to your personal computer at home, or to your equipment at work, Canbat offers top-performing batteries you can count on. If you don't have high performing batteries in your UPS during a power outage, you are putting yourself at risk of losing data. A power surge or blackout could erase hours of hard work and damage your equipment.

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E